


FRONT VIEW

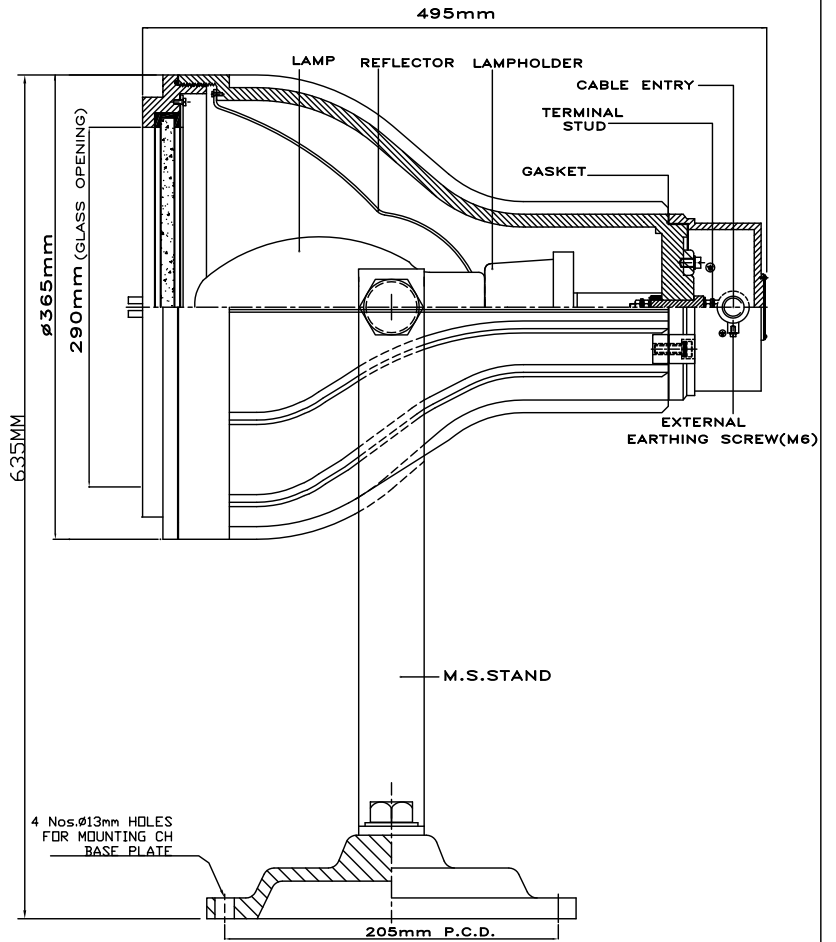

SECTION SIDE VIEW

NOTES:-

- 1 : FLAMEPROOF GROUPS-I, IIA & IIB AS PER IS:2148/81 & IS:2206 (PART-1)1984.
- 2 : DEGREE OF PROTECTION - IP:65 AS PER IS:2147/1962.
- 3 ; MATERIAL - CAST ALUMINIUM ALLOY LM6.
- 4 : FINISH - LIGHT GREY EPOXY POWDER COATING SHADE No.631 AS PER IS:5.
- 5 : EARTHING - 1No. INTERNAL & 2Nos. EXTERNAL SCREW OF M4/M6 SIZE.
- 6 : GASKET - NEOPRENE
- 7 : CABLE ENTRIES - 2 Nos. 3/4" ET FROM SIDE.
- 8 : TERMINALS - 2Nos. 3/15" STUD TYPE TERMINALS.
- 9 : INTERNAL ELECTRICAL COMPONENTS WILL BE WIRED UPTO TERMINALS.
- 10 : REFLECTOR - ALUMINIUM ANODISED REFLECTOR WILL BE PROVIDED.
- 11 : GLASS - FLAT HEAT RESISTANT CLEAR TOUGHENED GLASS "TYPE-A".
- 12 : LIGHT FITTING SUITABLE FOR 400W HPMV/MH LAMPS.

OVERALL DIMENSION : ±10mm

CUSTOMER			TITLE :-					
PROJECT			FLP-WP FLOOD LIGHT FITTING SUITABLE FOR 400W HPMV/MH & 500W GLS LAMP					
CONSULTANT								
DRAWN	SM		SCG Ex d TECH PVT LTD CHENNAI-600 032					
CHECKED	DKK							
APPROVED	GK							
SCALE	NTS	FILE REF. LF/1251	CAT.No. FL/A/991251	CMRS CERT No. CMRI/TC/P/H1202 Dt. 24/09/99	GA.DRG.No. SCG/OF0000/LF1251/0001	REV 0	DATE 14/11/05	